

WHISPER™ LOADERS

WHISPER™ loaders are self-contained vacuum conveying systems. Work automatically to maintain a constant material level in receiving hoppers installed on injection, extrusion or blow molding machine hoppers. Each self-contained system operates on a batch principle. The duration (time) of conveying and dump cycles is determined by adjustable timers.

FEATURES

- Automatic high level control with proximity sensor.
- Each WHISPER Loader operates as a self-contained, stand-alone system.
- Di-Ac (Diaphragm Action) automatic filter cleaning action.
- 120 volt power, pre-wired with power cords.
- Solid state PLC control with adjustable timers, function and maintenance indicator lights, built-in circuit breaker overload protection, and a 12-foot power cord
- Sound attenuation cone, (standard on SC1500 and SC1750 models)
- Vacuum motor, with quick disconnect for easy removal
- Ten feet of Flexible PVC conveying hose, with pick-up lance.
- Spun and welded aluminum construction.



SC1250-Series

The WHISPER™ Loader **SC1250-Series** is the most compact of the WHISPER™ Loader family.

Its size and capacity make it ideal for smaller molding and extruding machines



SC1500-Series

The **SC1500-Series** is the most flexible of the WHISPER™ Loader family. Its size offers the most versatility. SC1500-Series loaders include, as a standard, a remote-mounted electrical control panel and twelve feet of electrical connector cables.




SC1750-Series

The *powerhouse* of the WHISPER™ Loader line, the **SC1750-Series** has the largest capacity, making ideal for large molding and extruding machines.

REMOTE CONTROL PANEL



Remote-mounted electrical control panel is standard on SC1500-Series and SC1750-Series, and is optional on the SC1250-Series.

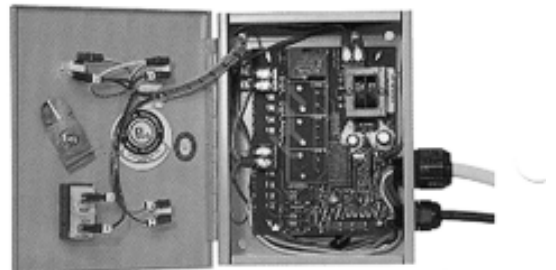

©2008 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week
1-800-809-4623

WebSite: www.molderschoice.com • Email: molders@molderschoice.com