

Push-On WATERLINE HOSE

No clamps required – Just push it onto barbed fittings
Color Coordinate your hose hookup


Progressive molders realize that time is money! Any action to reduce mold setup time and ensure proper hose hookup means your setup personnel are working to greater efficiency. When cooling your mold with chiller or tower water, use BLUE hose TO the mold ports. Use the RED hose as your RETURN lines FROM the mold returning to your chiller etc. Use YELLOW for compressed air and GRAY for other applications.

See Page 287
 for PUSH-LOK
 Assembly Tool

NO CLAMPS REQUIRED !!

ADVANTAGES:

- Abrasion, age and weather resistant
- For temperatures to 200° F
- Oil resistant
- Neoprene tube and cover
- 1 Textile braid reinforcement
- -40°F to 200°F temperature range
- 200 to 300 psi working pressure

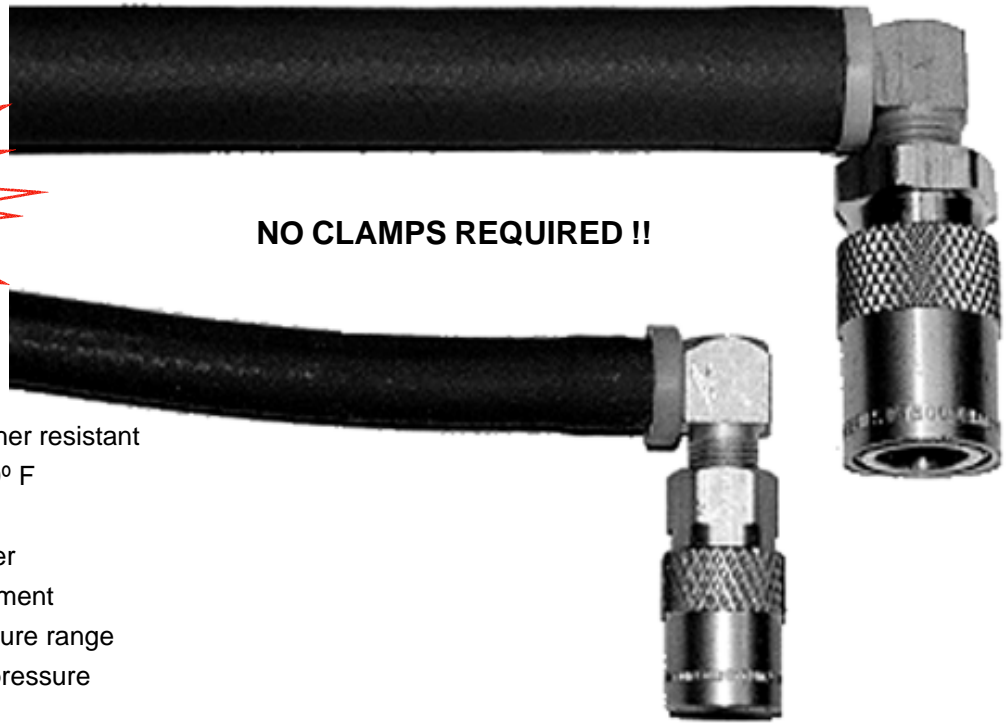

Now
 Stocked
 In:
 Blue,
 Red
 Yellow
 & Gray

PART #	Hose I.D.	Hose O.D.	Color	Price per ft.	PART #	Hose I.D.	Hose O.D.	Color	Price per ft.
PWH14R	1/4"	1/2"	Red	\$.85	PWH12R	1/2"	3/4"	Red	\$1.25
PWH14BL	1/4"	1/2"	Blue	\$.85	PWH12BL	1/2"	3/4"	Blue	\$1.25
PWH14Y	1/4"	1/2"	Yellow	\$.85	PWH12Y	1/2"	3/4"	Yellow	\$1.25
PWH14GR	1/4"	1/2"	Gray	\$.85	PWH12GR	1/2"	3/4"	Gray	\$1.25
PWH38R	3/8"	5/8"	Red	\$1.20	PWH34R	3/4"	1-1/16"	Red	\$2.40
PWH38BL	3/8"	5/8"	Blue	\$1.20	PWH34BL	3/4"	1-1/16"	Blue	\$2.40
PWH38Y	3/8"	5/8"	Yellow	\$1.20	PWH34Y	3/4"	1-1/16"	Yellow	\$2.40
PWH38GR	3/8"	5/8"	Gray	\$1.20	PWH34GR	3/4"	1-1/16"	Gray	\$2.40

©2009 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week
1-800-809-4623
 WebSite: www.molderschoice.com • Email: molders@molderschoice.com

Standard WATERLINE HOSE

**Works with standard hose clamps.
Color Coordinate your hose hookups.**

Progressive molders realize that time is money! Any action to reduce mold setup time and ensure proper hose hookup means your setup personnel are working to greater efficiency. When cooling your mold with chiller or cooling tower water, use BLUE or BLACK hose TO the mold ports. Use the RED hose as your RETURN lines FROM the mold returning to your chiller etc.

ADVANTAGES:

- Economical
 - Abrasion, age and weather resistant
 - -40° F to 180° F temperature range
 - EPDM cover and tube
 - 2 to 4 Textile spirals for reinforcement
 - Color: Red, Black & Blue
 - **UL- Ultra-Force** Hose is best used for chiller water
- Temperature range: -20° F to 150° F
Cover: Rubber Modified, non marking thermoplastic / Pin pricked



See Pages 269 and 270
for Hose Clamps

PRICES

PART#	Hose I.D.	Hose O.D.	Color	Working Pressure	Price Per Foot	PART#	Hose I.D.	Hose O.D.	Color	Working Pressure	Price Per Foot
SWH14R	1/4"	19/32"	Red	250 psi	\$.48	SWH34BK	3/4"	1-3/16"	Black	250 psi	\$1.25
SWH14BK	1/4"	19/32"	Black	250 psi	\$.48	SWH100R	1"	1-1/2"	Red	250 psi	\$1.80
SWH38R	3/8"	23/32"	Red	250 psi	\$.67	SWH100BK	1"	1-1/2"	Black	250 psi	\$1.80
SWH38BK	3/8"	23/32"	Black	250 psi	\$.67	SWH114R	1-1/4"	1-25/32"	Red	250 psi	\$3.50
SWH12R	1/2"	7/8"	Red	250 psi	\$.80	SWH114BK	1-1/4"	1-25/32"	Black	250 psi	\$3.50
SWH12BK	1/2"	7/8"	Black	250 psi	\$.80	SWH112R	1-1/2"	1-31/32"	Red	250 psi	\$4.25
SWH58R	5/8"	31/32"	Red	250 psi	\$.95	SWH112BK	1-1/2"	1-31/32"	Black	250 psi	\$4.25
SWH58BK	5/8"	31/32"	Black	250 psi	\$.95	SWH200R	2"	2-23/32"	Red	250 psi	\$9.00
SWH34R	3/4"	1-3/16"	Red	250 psi	\$1.25	SWH200BK	2"	2-23/32"	Black	250 psi	\$9.00

© 2009 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week

1-800-809-4623

WebSite: www.molderschoice.com • Email: molders@molderschoice.com