

ROBOT ENCLOSURES


Protect Your Workers from Injury

Meet ANSI B151.27 and R15.06 specifications

Framing is rigid 40 mm or 50 mm extrusion of fine-grained, 6160-alloy aluminum.

Panels are wire mesh or 6 mm clear polycarbonate to endure rough usage, yet allow full view of robot. Wire mesh is flat -welded steel with PVC coating.

Angle fittings lock enclosure components into extremely rigid structure.

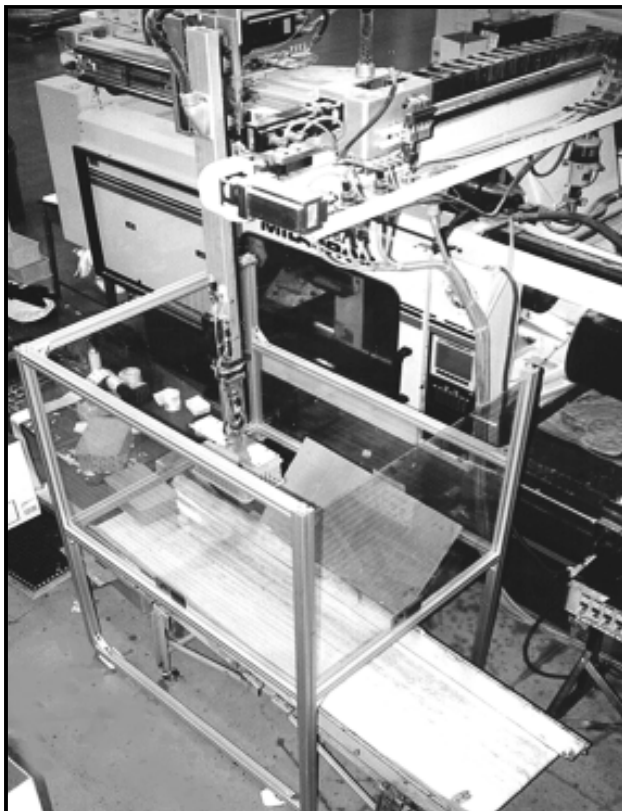

Interlocks are recommended for all enclosures and are required to meet ANSI specifications.

Mechanical Switches, Light Curtains, Photo-Eyes and Floormat-Type Safety Shutoffs are available from Molders Choice.

© 2009 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week

1-800-809-4623

WebSite: www.molderschoice.com • Email: molders@molderschoice.com