

# WHISPER™ LOADERS OPTIONS



## POWDER CAPABILITY

Includes pleated cartridge filters, automatic pulse filter cleaning, and larger receiver to hold the larger filters.



## VIBRA-PULSE

Is a filter cleaning system useful when conveying dusty product . It uses pulses of air automatically released as required. The different filter media are available to accommodate varying dust levels.



## CARTRIDGE FILTERS

12" to 36" pleated cartridge filters. A variety of flat filters are also available.

## INTERBLEND

is a static internal blender used to prevent layering in with a proportioning loader.




## PROPORTIONAL LOADING

Allows for the alternate conveying of two different materials.

### PROPORTIONAL LOADER OPERATING SEQUENCE WITH INTERBLEND

1. The ratio selection of virgin and regrind is a direct reading from 0 to 100%. The total cycle time is factory preset and may be field adjusted to compensate for conveying distance. Adjustment of the cycle time does not alter the ratio adjustment. With switch ON and no material sensed in the receiving hopper, virgin is loaded.
2. After the virgin material requirement is reached, regrind is loaded.
3. OFF time allows material to dump or discharge. Materials are blended as they are discharged.

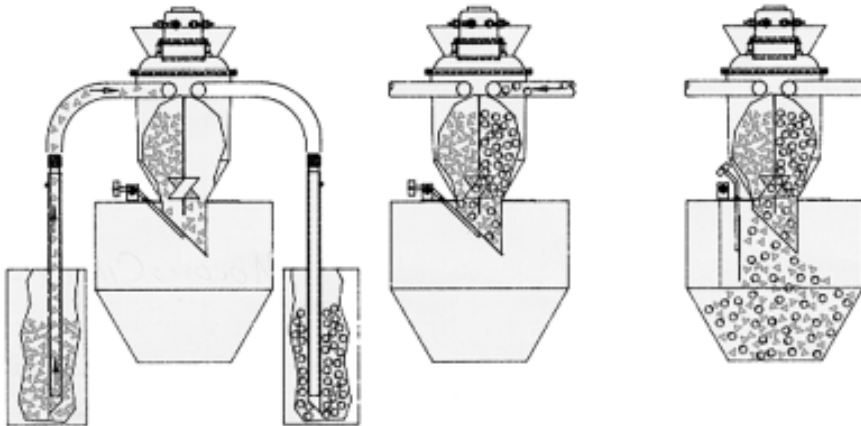

© 2009 MOLDERS CHOICE, Inc.



24 Hour Service - 7 Days a week  
**1-800-809-4623**  
 WebSite: [www.molderschoice.com](http://www.molderschoice.com) • Email: [molders@molderschoice.com](mailto:molders@molderschoice.com)